

10/12/99
jc598 U.S. PTO

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, D.C. 20037-3202
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

jc598 U.S. PTO
09/415201
10/12/99

A

CALIFORNIA OFFICE

1010 EL CAMINO REAL
MENLO PARK, CA 94025
TELEPHONE (650) 325-5800
FACSIMILE (650) 325-6606

October 12, 1999

JAPAN OFFICE

TOEI NISHI SHIMBASHI BLDG. 4F
13-5 NISHI SHIMBASHI 1-CHOME
MINATO-KU, TOKYO 105, JAPAN
TELEPHONE (03) 3503-3760
FACSIMILE (03) 3503-3756

BOX: PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Masato SOME and Seishi IKAMI
METHOD AND APPARATUS FOR CORRECTING DISTORTION ABERRATION IN POSITION AND DENSITY IN DIGITAL IMAGE BY USING DISTORTION ABERRATION CHARACTERISTIC
Our Reference: Q56206

Dear Sir:

Attached hereto is the application identified above including the specification, claims, five (5) sheets of drawings and one (1) priority document. The requisite U.S. Government Filing Fee, executed Declaration and Power of Attorney and Assignment will be submitted at a later date.

The Government filing fee is calculated as follows:

Total Claims	8 - 20 =	0 x \$18 =	\$ 000.00
Independent Claims	2 - 3 =	0 x \$78 =	\$ 000.00
Base Filing Fee	(\$760.00)		\$ 760.00
Multiple Dep. Claim Fee	(\$260.00)		\$ 000.00
TOTAL FILING FEE			\$ 760.00

Priority is claimed from:

Japanese Patent Application

289269/1998

Filing Date

October 12, 1998

Respectfully submitted,
SUGHRUE, MION, ZINN, MACPEAK & SEAS
Attorneys for Applicant(s)

By: Darryl Mexic
Darryl Mexic
Reg. No. 23,063

DM:tnj

METHOD AND APPARATUS FOR CORRECTING DISTORTION ABERRATION IN
POSITION AND DENSITY IN DIGITAL IMAGE BY USING DISTORTION
ABERRATION CHARACTERISTIC

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a method and an apparatus for correcting influence of distortion aberration of a lens on image information.

Description of the Related Art

Various types of aberration, such as spherical aberration, coma aberration, astigmatism, field curvature, and distortion aberration, are known as aberration of a lens. Usually, these types of aberration are suppressed within a desired range for observing an image of an object by improving an optical system.

However, the above types of aberration are inter-related. For example, if one of the above types of aberration is suppressed, another type of aberration may increase. Therefore, it is not possible to completely eliminate all the types of aberration at the same time. Thus, conventionally, some of the above types of aberration may be selectively suppressed based on characteristics of devices in which the lens is used, or all the types of aberration are suppressed as much as possible based on consideration of the balance among them.

Recently, image digitization is being widely utilized.

Typically, images formed by a lens are directly digitized by using a photoelectric reading device such as a CCD (charge-coupled device), or analog images recorded in a film or the like are digitized by reading them by a scanner. In the case wherein images are processed after digitization, it is not necessary to completely suppress the aberration when images are formed by an optical system. In particular, it is relatively easy to suppress influences of the distortion aberration by performing signal processing on digitized images (image information).

In the conventional technique, influences of the distortion aberration in a digitized image are usually corrected by using affine transformations. However, in the technique using the affine transformation, each image is divided into a plurality of polygons and each polygon is deformed based on corresponding points in the plurality of polygons. Therefore, it is very complicated and impractical to correct influences of an aberration such as the distortion aberration of a lens by using the affine transformation, where the influences are symmetric with respect to an optical axis. In particular, it is difficult to correct the image with high accuracy.

In addition, it is not possible to perform accurate quantitative image analysis based on a (photographic) density or brightness thereof since the density or brightness of each portion of the image varies due to the distortion.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a method and an apparatus for correcting influences of distortion aberration of a lens on an image formed by the lens, wherein accuracy of position information and density information of the image is improved.

According to the first aspect of the present invention, there is provided a method for correcting influences of distortion aberration of a lens on an image formed by the lens, wherein position information and at least one kind of image information (an image data value or image data values) belonging to each position of the image are corrected according to a distortion aberration characteristic of the lens.

The above "at least one kind of image information belonging to each position" may include a density or brightness (luminance) value of each pixel, and other various signal values belonging to each pixel.

More particularly, according to the present invention, positions and the above at least one kind of information belonging to respective portions of an image formed on an image surface by a lens having the distortion aberration are corrected according to a distortion aberration characteristic which indicates distortions at respective distances from an optical axis in the image, respectively.

Preferably, first, positions in the image before the correction of the positions, corresponding to predetermined

positions in the image after the correction of the positions,
are obtained based on the distortion aberration characteristic.
Then, the above at least one kind of information belonging to
each of the obtained positions in the image before the
5 correction of the positions is obtained, as the above at least
one kind of information belonging to a corresponding one of
the above predetermined positions in the image after the
correction of the positions, based on values of the above at
least one kind of information belonging to one or more pixels
10 in the image before the correction of the positions near each
of the above obtained positions by using a nearest point
approximating method, interpolation, or the like.

Since positions in the image surface vary due to the
distortion (aberration), areas of microscopic regions of the
image surface also vary due to the variation of the positions
caused by the distortion aberration. Therefore, among various
kinds of information belonging to each position of the image,
at least one kind of information which depends on an area, such
as densities, brightness, and the like, also varies depending
upon the variation (distortion) in the position information.
20 Thus, the density or brightness values of the predetermined
pixels after the correction of the positions, which are
obtained as above, may be further corrected in consideration
of the change of areas due to the distortion of the image.

25 According to the second aspect of the present invention,
there is provided an apparatus for correcting influences of

distortion aberration of a lens, in a first image formed on an image surface by the lens. The apparatus according to the second aspect of the present invention is provided for executing the method according to the first aspect of the present invention. The apparatus contains an image reading unit for reading a first image formed on the image surface by the above lens, a distortion aberration characteristic storing unit for storing a distortion aberration characteristic of the lens, where the distortion aberration characteristic indicates distortions at respective distances from an optical axis on the image surface, a distorted position determining unit for determining distorted positions in the first image read by the image reading unit, corresponding to predetermined positions in a second image in which the distortions are corrected, and a position-dependent information obtaining unit for obtaining at least one kind of image information (an image data value or image data values) belonging to the above predetermined positions based on the distortion aberration characteristic.

When the method and apparatus according to the first and second aspects of the present invention are used, influences of distortion aberration in position information and the at least one kind of image information (an image data value or image data values) belonging to each position of the image, such as densities or brightness of each pixel, can be corrected with high accuracy according to the distortion aberration characteristic of the lens. Therefore, the accurate

correction of the position information and the at least one kind of image information belonging to each position can be carried out very easily. Thus, for example, when the quantitative image analysis is performed on digital images from which influences of distortion aberration are eliminated by the present invention, the accuracy of the analysis can be remarkably improved, compared with the result of the conventional technique. In addition, even if a lens having a serious distortion aberration is used, a high degree of accuracy can be achieved by use of the present invention. In other words, the same degree of accuracy as that is achieved by the conventional technique can be achieved by using a less expensive lens according to the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

Fig. 1 is a diagram illustrating a distortion aberration characteristic of a lens;

Fig. 2 is a diagram illustrating a construction in which an image of an object is formed on an image surface by a lens having a distortion aberration characteristic;

Fig. 3a is a diagram illustrating a point of an image from which influences of the distortion aberration are eliminated;

Fig. 3b is a diagram illustrating a point of an image formed by a lens having a distortion aberration;

Fig. 4a is a diagram illustrating a microscopic region

of the image from which influences of the distortion aberration are eliminated;

Fig. 4b is a diagram illustrating a microscopic region of the image formed by the lens having the distortion aberration; and

Fig. 5 is a block diagram illustrating the construction of the image information readout apparatus, which contains the apparatus according to the second aspect of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The embodiments of the present invention are explained below with reference to the drawings. Although, hereinafter, explanations are provided for one or both of (photographic) density and brightness as examples of the aforementioned at least one kind of information belonging to each position of an image, it will be understood that the following explanations are also applicable for other kind of information belonging to each position of the image.

Correction of Distortion and Density

Usually, the distortion aberration characteristic of a lens is determined on an image surface as illustrated in Fig. 1. That is, Fig. 1 illustrates a relationship, on an image surface, between an ideal image height (abscissa) and a distortion amount due to the distortion aberration corresponding to the image height (ordinate), where the "ideal image height" is a height of an image when no distortion

aberration exists. In Fig. 1, the image height r is normalized, and the distortion amount is indicated by a distortion ratio $f(r)=(r'-r)/r$, where r is the normalized image height, i.e., the normalized distance from the optical axis on the image surface, and r' is the distance after being deformed by the distortion aberration.

Position information of an image actually formed on an image surface, i.e., position information of an image influenced by the distortion aberration, can be corrected based on the distortion aberration characteristic, to obtain ideal position information in the image in which distortions are eliminated.

When an image formed on a predetermined image surface (influenced by the distortion aberration) is corrected based on the distortion aberration characteristic, values (e.g., a density value, a luminance value, and the like) of each pixel after the correction are requested to be output in a storage medium such as a frame memory in a liquid crystal display device. In such a storage medium, pixel positions are predetermined. If the position information (coordinates) of one of the predetermined pixels is corrected based on the distortion aberration characteristic, the corrected coordinates may not exactly correspond to coordinates of one of the predetermined pixels. Therefore, according to the present invention, preferably, a value (e.g., a density value, a luminance value, and the like) of each of the above predetermined pixels in the

image in which the distortions are corrected is obtained based on a value or values of one or more pixels around a pixel corresponding to the each of the above predetermined pixels in the image in which the distortions are corrected, by using a nearest point approximating method, interpolation, or the like.

For example, when the distortion aberration characteristic is expressed by the distortion ratio $f(r)=(r'-r)/r$, as illustrated in Fig. 1, the correction is performed in accordance with the following procedure.

(i) The position of the optical axis on the image surface is assumed to be the origin (0, 0).

(ii) The distance r to a point (x, y) in the corrected image which is not distorted is obtained.

(iii) A point (x', y') in the distorted image, corresponding to the above point (x, y) in the corrected image, is obtained based on the following equations (1) and (2).

$$x'=x\{1+f(r)\} \quad (1)$$

$$y'=y\{1+f(r)\} \quad (2)$$

(iv) The density D' of the point (x', y') is obtained based on the density or densities of one or more image points (u, v) located near the point (x', y') in the distorted image by using a nearest point approximating method, interpolation, or the like, where u and v are integers. Thus, the density D' of the point (x', y') in the distorted image is obtained as the density D' of the point (x, y) in the corrected

image.

The values of the distortion ratio $f(r)$ for the distance values r may be stored in advance in a lookup table, and in the above operation (iii), the value of the distortion ratio $f(r)$ is obtained by referring to the lookup table.

Correction by Equations (1) And (2)

The correction of the position (coordinates) and densities according to the equations (1) and (2) are explained below with reference to Figs. 2, 3a, and 3b.

Fig. 2 shows a scene in which an image of an object is formed on an image surface by a lens having a distortion aberration characteristic. In Fig. 2, a square lattice is indicated as the object, and the image of the square lattice formed on the image surface is distorted, and is then corrected. The distortion aberration characteristic is indicated, for example, by the distortion ratio $f(r)=(r'-r)/r$, as illustrated in Fig. 1, where r is the distance from the optical axis on the image surface.

Fig. 3a shows coordinates (x, y) of a point A and the distance r $(=(x^2+y^2)^{1/2})$ thereto from the optical axis on the image surface, in an ideal (corrected) image which is not affected by a distortion aberration, i.e., an image from which influences of the distortion aberration are eliminated, and Fig. 3b shows coordinates (x', y') of a point A' and the distance r' $(=(x'^2+y'^2)^{1/2})$ thereto from the optical axis on the image surface, in an image actually formed by a lens having the

distortion aberration, i.e., a distorted image which is affected by the distortion aberration, where the above point A in the ideal (corrected) image corresponds to the point A' in the actual (distorted) image. The relationship of the equations (1) and (2) exists between the coordinates (x, y) of the point A and the coordinates (x', y') of the point A'. That is, due to the distortion aberration, the ideal image point A is shifted to the point A' in the distorted (actual) image. As explained before, the ideal image point A is located at a predetermined position, for example, corresponding to one of a plurality of pixel positions of a frame memory.

As explained before, the density D' of the above point (x', y') is obtained based on the density or densities of one or more (for example, four) image points (u, v) located around the image point (x', y') by using a nearest point approximating method, interpolation, or the like, where u and v are integers, and the density D' of the point (x', y') of the distorted image is recognized as the density D' of the corresponding image point (x, y) of the corrected image.

Thus, data of the corrected image can be produced by performing the above operation for all of the predetermined points of the corrected image.

Although all of the above explanations relating to the equations (1) and (2) are provided for density, these explanations are also applicable to other kinds of information (such as brightness) belonging to each pixel of an image.

Further Correction of Density

A method for correcting variations in the density caused by the distortion aberration with higher accuracy is explained below.

As the distortion aberration characteristic is determined as illustrated in Fig. 1, the position information varies due to the distortion aberration. That is, areas of microscopic regions in the image surface also vary due to the variation of the position information caused by the distortion aberration. Thus, densities on the image surface also vary depending upon the position information, i.e., depending upon the distortion aberration characteristic.

Therefore, the density value D' of the point (x, y) in the corrected image, obtained by the above steps (i) to (iv), may be corrected for the above variation of areas of microscopic regions of the image, based on the distortion aberration characteristic.

For example, the density D' of the image point (x, y) obtained by the above steps (i) to (iv) can be further corrected by the following equation (3) to obtain a further corrected value D of the density of the image point (x, y) .

$$D = D' \times \{1 + f(r)\} \times \{1 + r \times f'(r) + f(r)\}, \quad (3)$$

where $f'(r) = \Delta f(r) / \Delta r$

Derivation of Equation (3)

Next, the aforementioned further correction by using the

equation (3) is explained below with reference to Figs. 3a, 3b, 4a, and 4b.

Fig. 4a shows a microscopic region around the image point A in Fig. 3a having an area S, and Fig. 4b shows a microscopic region around the image point A' in Fig. 3b having an area S'. When it is assumed that the microscopic region of the area S in the corrected image corresponds to the microscopic region of the area S' in the distorted image, the following relationship exists between the density D of the microscopic region of the area S in the corrected image and the density D' of the microscopic region of the area S' in the distorted image:

$$D \times S = D' \times S'$$

That is,

$$D = D' \times S' / S \quad (4)$$

As indicated in Fig. 4a, the microscopic region of the area S in the image after the correction is defined as a difference between a sector having a radius r2 and a central angle $\Delta\theta$ and a sector having a radius r1 and the same central angle $\Delta\theta$, where

$$r1 = r - \Delta r / 2, \text{ and} \quad (5)$$

$$r2 = r + \Delta r / 2 \quad (6)$$

That is,

$$S = (r2^2 - r1^2) \times \Delta\theta / 2 \quad (7)$$

Similarly, as indicated in Fig. 4b, the microscopic region of the area S' in the image before the correction is defined as a difference between a sector having a radius r2' and a central

angle $\Delta\theta$ and a sector having a radius r_1' and the same central angle $\Delta\theta$. That is,

$$S = (r_2'^2 - r_1'^2) \times \Delta\theta / 2 \quad (8)$$

Due to the distortion aberration characteristic,

$$r_1' = r_1 \{1 + f(r_1)\}, \text{ and} \quad (1')$$

$$r_2' = r_2 \{1 + f(r_2)\} \quad (2')$$

Therefore, the ratio S'/S of areas is written as

$$\begin{aligned} S'/S &= \{(r_1' + r_2') \times (r_1' - r_2')\} / \{(r_1 + r_2) \times (r_1 - r_2)\} \\ & \quad (9) \end{aligned}$$

From the definitions of r_1 and r_2 in the equations (5) and (6),

$$r_1 + r_2 = 2r, \text{ and} \quad (10)$$

$$r_2 - r_1 = \Delta r \quad (11)$$

In addition, from the relationships (1') and (2'),

$$\begin{aligned} r_1' + r_2' &= 2r + r \{f(r_1) + f(r_2)\} \\ &\quad + \{f(r_2) - f(r_1)\} \Delta r / 2, \text{ and} \\ r_2' - r_1' &= \Delta r + r \{f(r_2) - f(r_1)\} \\ &\quad + \{f(r_1) + f(r_2)\} \Delta r / 2 \end{aligned}$$

Therefore, the equation (9) is written as

$$\begin{aligned} S'/S &= [1 + \{f(r_1) + f(r_2)\} / 2 \\ &\quad + \{f(r_2) - f(r_1)\} \Delta r / (4r)] \\ &\quad \times [1 + r \{f(r_2) - f(r_1)\} \Delta r \\ &\quad + \{f(r_1) + f(r_2)\} / 2] \quad (9') \end{aligned}$$

When $\Delta r \rightarrow 0$,

$$f(r_1)+f(r_2) \rightarrow 2f(r), \text{ and}$$

$$\{f(r_2)-f(r_1)\}/\Delta r \rightarrow \Delta f(r)/\Delta r=f'(r)$$

Substituting these approximations into the equation (9'),

$$S'/S$$

$$=\{1+f(r)\} \times \{1+r \times f'(r)+f(r)\}, \quad (9'')$$

where

$$f(r)=(r'-r)/r, \text{ and}$$

$$f'(r)=\Delta f(r)/\Delta r$$

Substituting the equation (9'') into the equation (4), the equation

$$D=D' \times \{1+f(r)\} \times \{1+r \times f'(r)+f(r)\} \quad (3)$$

is obtained.

Thus, the density D' obtained by the steps (i) to (iv) can be further corrected to the density D by the equation (3).

Although all of the above explanations relating to the equation (3) are provided for density, these explanations are also applicable to other kinds of information (such as brightness) belonging to each pixel of an image when the information satisfies the equation (4).

Another Coordinate System

Although, in the above examples, the origin of the coordinate system is located at the position of the optical axis in the image surface, generally, the position of the optical axis may not be the origin. When the coordinates of the position of the optical axis in the image surface is (x_0, y_0) , the equations (1) and (2) should be replaced with the

following equations (1") and (2")

$$x=(x'-x_0)/\{1+f(r)\}+x_0 \quad (1")$$

$$y=(y'-y_0)/\{1+f(r)\}+y_0 \quad (2")$$

In this case, the distance from the optical axis to the point
5 (x, y) is

$$r=\{(x-x_0)^2+(y-y_0)^2\}^{1/2}$$

Applications of the Invention

The method and apparatus according to the first and second
aspects of the present invention can be utilized in the fields
10 of biochemistry and molecular biology. For example, the method
and apparatus according to the first and second aspects of the
present invention can be used in a quantitative image analysis
performed on an image formed by light (chemiluminescence or
fluorescence) emitted from a sample, where the sample is
15 dropped or spread on a microtitre plate or a microarray chip
(DNA chip). In this application, the image of the sample is
formed by a lens on a light receiving surface (as the image
surface) of the image reading unit such as a charge-coupled
device (CCD). In particular, the method and apparatus
20 according to the first and second aspects of the present
invention is suitable for determining, with high accuracy,
positions and luminous intensities of weak light emitted from
the above sample.

Construction of Apparatus

25 Fig. 5 is diagram illustrating the construction of an
image information readout apparatus as an embodiment of the

second aspect of the present invention.

In Fig. 5, reference numeral 11 denotes a cooled charge-coupled device (CCD), 12 denotes a lens, 20 denotes a sample holder, 30 denotes light sources, 40 denotes an excitation light cutoff filter, 50 denotes a first frame memory, 61 denotes a memory, 62 denotes a pixel position correction unit, 63 denotes a brightness correction unit, 64 denotes a second frame memory, and 70 denotes a sample.

The sample 70 is held on the sample holder 70. For example, in this embodiment, an organic material is distributed in the sample 70, and the organic material is labeled by a fluorescent dye. The fluorescent dye emits fluorescent light when exposed to excitation light. The light sources 30 emit the excitation light to be applied to the sample 70. The excitation light cutoff filter 40 cuts off the excitation light scattered by the sample 70, and passes only the fluorescent light emitted from the sample 70. The lens 12 condenses the fluorescent light emitted from the sample 70, and forms an image of the fluorescent light on an imaging surface (a light-receiving surface of the charge-coupled device (CCD) 11). The image formed by the lens 12 is affected by the distortion aberration of the lens 12, i.e., the formed image is distorted. The charge-coupled device (CCD) 11 has a plurality of solid-state imaging elements arrayed in a plane. The solid-state imaging elements correspond to a plurality of pixels, and have their light-receiving surfaces in the imaging surface. Signals

representing the above image of the fluorescent light are generated by the charge-coupled device (CCD) 11, and are transferred to the first frame memory 50. The first frame memory 50 has a plurality of storage areas corresponding to the plurality of pixels, receives the above signals representing the image of the fluorescent light from the charge-coupled device (CCD) 11, and stores therein the image information for one frame. The memory 61 stores the distortion aberration characteristic of the lens 12, for example, as illustrated in Fig. 1. The second frame memory 64 is provided for storing information on a distortion-corrected image from which distortions due to the distortion aberration of the lens 11 are eliminated, and has areas for storing image information for each pixel of the distortion-corrected image. The image position correction unit 62 first performs calculation to obtain a position (the aforementioned position of the coordinates (x', y')) in the first frame memory 50 corresponding to (an address for) each pixel of the distortion-corrected image, based on the distortion aberration characteristic stored in the memory 61 by using the equations (1) and (2). The brightness correction unit 63 performs calculation to obtain a brightness D' of the above position in the first frame memory 50 obtained by the position correction unit 62, based on brightness values $D1'$, $D2'$, $D3'$, and $D4'$ of four nearest pixels (respectively having coordinates $(u1, v1)$, $(u2, v2)$, $(u3, v3)$, and $(u4, v4)$) in the image stored in the

first frame memory 50 around the above position calculated by the position correction unit 62, by using interpolation. Then, the brightness correction unit 63 further performs the calculation of the equation (3) to obtain a further corrected brightness value D corresponding to each pixel of the image to be stored in the second frame memory 64. Thus, the corrected brightness values D for all of the pixels of the distortion-corrected image are stored in the second frame memory 64. If a very accurate correction of the brightness values is not required, the correction by the equation (3) may not be performed.

As explained above, with the image information readout apparatus of Fig. 5, the distortion-corrected image obtained in the second frame memory 64 is not affected by the distortion aberration of the lens 12. Therefore, the quantitative image analysis can be performed with high accuracy.

Others

Further, the method and apparatus according to the first and second aspects of the present invention can be also utilized in other fields of technology. For example, the method and apparatus according to the first and second aspects of the present invention can be used for digital images produced by digitizing photographic images produced on silver films by conventional cameras.

In addition, all of the contents of the Japanese patent application, No.10(1998)-289269 are incorporated into this

specification by reference.

What is claimed is:

1. A method for correcting influences of a distortion aberration of a lens in an image formed on an image surface by said lens, wherein distortions and least one kind of image information belonging to each position of the image are corrected according to a distortion aberration characteristic of the lens, and the distortion aberration characteristic indicates distortions at respective distances from an optical axis of the lens on said image surface.

2. A method according to claim 1, wherein said at least one kind of image information belonging to each position may be one of a density or brightness (luminance) value of each pixel of said image, and various other signal values belonging to each pixel of said image.

3. A method according to claim 1, wherein the distortion aberration characteristic is expressed by a distortion ratio $f(r)=(r'-r)/r$, where the distances from the optical axis on said image surface after correction of said position information are denoted by r , and said distances from the optical axis on said image surface before correction of said position information are denoted by r' ,

points of the image before the correction having coordinates (x', y') corresponding to predetermined points of the image after the correction having coordinates (x, y) are obtained based on equations,

$$x'=x\{1+f(r)\}, \text{ and}$$

$$y'=y\{1+f(r)\},$$

where a position of the optical axis on the image surface is assumed to have coordinates (0, 0), and

values of said at least one kind of image information at the corresponding points of the image before the correction having the coordinates (x', y') are obtained, as values D' of said at least one kind of image information at said predetermined points of the image after the correction having the coordinates (x, y), based on a value or values of said at least one kind of image information at one or more image points having the coordinates (u, v) located near each of the corresponding points having the coordinates (x', y') on the image before the correction, where u and v are integers.

4. A method according to claim 3, wherein said values D' of said at least one kind of image information at said predetermined points of the image after the correction having the coordinates (x, y) are further corrected by an equation

$$D=D'\times\{1+f(r)\}\times\{1+r\times f'(r)+f(r)\},$$

to obtain further corrected values D of said at least one kind of image information at said predetermined points of the image after the correction having the coordinates (x, y).

5. An apparatus for correcting influences of a distortion aberration of a lens in a first image formed on an image surface by said lens, said apparatus comprises;

an image reading unit for reading the first image formed on the image surface by the lens;

a distortion aberration characteristic storing unit for storing a distortion aberration characteristic of the lens, where the distortion aberration characteristic indicates distortions at respective distances from an optical axis on the image surface;

a distorted position determining unit for determining distorted positions in the first image read by the image reading unit, corresponding to predetermined positions in a second image in which said distortions are corrected, and

a position-dependent information obtaining unit for obtaining at least one kind of image information belonging to the above predetermined positions based on the distortion aberration characteristic.

6. An apparatus according to claim 5, wherein said at least one kind of image information belonging to each position may be one of a density or brightness (luminance) value of each pixel of said image, and other various signal values belonging to each pixel of said image.

7. An apparatus according to claim 5, wherein the distortion aberration characteristic is expressed by a distortion ratio $f(r)=(r'-r)/r$, where the distances from the optical axis on said image surface after correction of said position information are denoted by r , and said distances from the optical axis on said image surface before correction of said position information are denoted by r' ,

said position correcting unit obtains points of the image

before the correction having coordinates (x', y') corresponding to predetermined points of the image after the correction having coordinates (x, y) , based on equations,

$$x' = x\{1 + f(r)\}, \text{ and}$$

$$y' = y\{1 + f(r)\},$$

where a position of the optical axis on the image surface is assumed to have coordinates $(0, 0)$, and

said position-dependent information obtaining unit obtains, as a value D' of said at least one kind of image information at each of said predetermined points of the second image having the coordinates (x, y) , a value of said at least one kind of image information at a corresponding one of said points having the coordinates (x', y') , based on a value or values of said at least one kind of image information at one or more image points having the coordinates (u, v) located near said corresponding one of the points having the coordinates (x', y') in the first image, where u and v are integers.

8. An apparatus according to claim 7, wherein said density obtaining unit further corrects said values D' of said at least one kind of image information at said predetermined points of the second image having the coordinates (x, y) , by an equation

$$D = D' \times \{1 + f(r)\} \times \{1 + r \times f'(r) + f(r)\},$$

to obtain further corrected values D of said at least one kind of image information at said predetermined points of the second image having the coordinates (x, y) .

ABSTRACT OF THE DISCLOSURE

A method and an apparatus for correcting influences of a distortion aberration of a lens in an image formed on an image surface by the lens. Distortions of respective portions of the image are corrected according to a distortion aberration characteristic of the lens. The distortion aberration characteristic indicates distortions at respective distances from an optical axis of the lens on the image surface. Then, a value of at least one kind of information belonging to each point of the image in which the distortions are corrected is determined based on values of the at least one kind of information belonging to points around a corresponding point in the image before the correction. Further, the density or brightness values of the predetermined pixels after the correction of the positions may be further corrected in consideration of the change of areas due to the distortion of the image.

REF ID: A661460




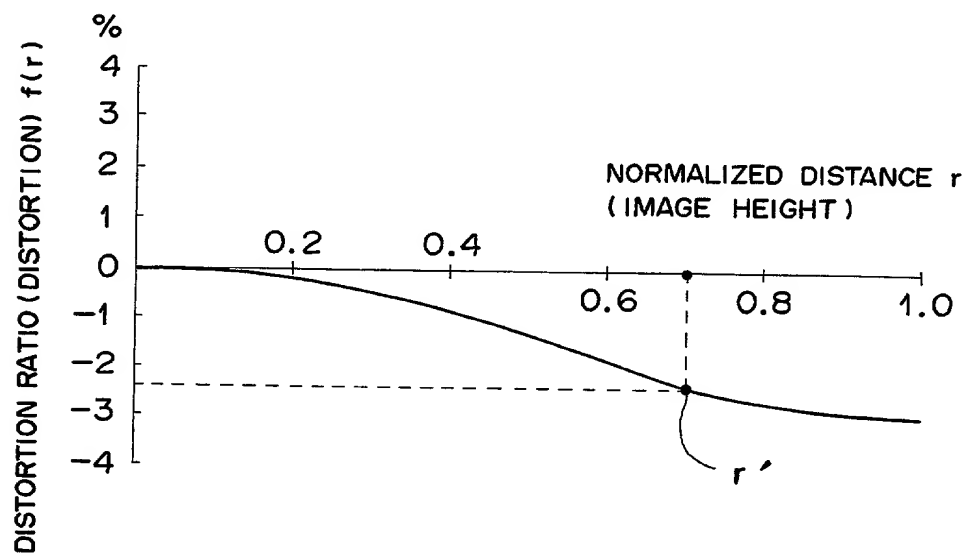


FIG. 1


	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

[illegible]

F I G . 4 a

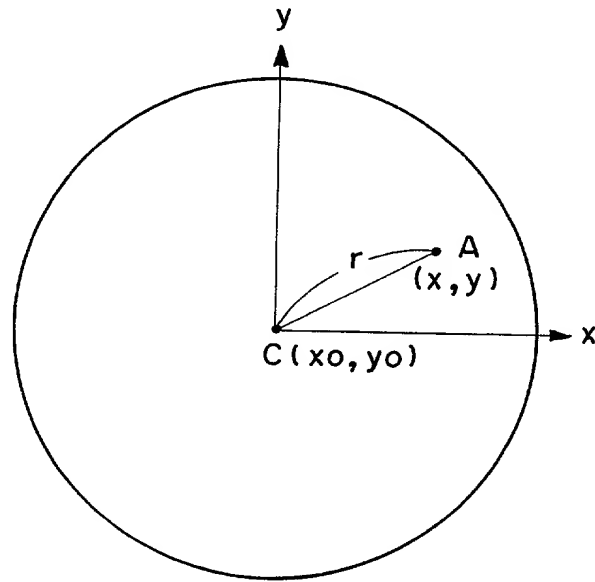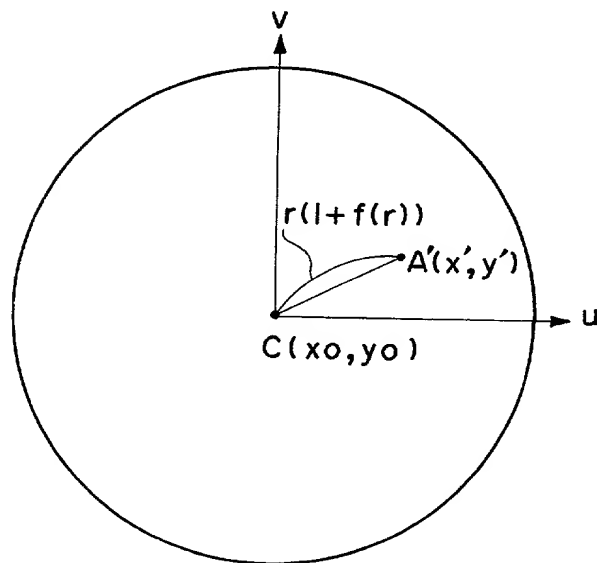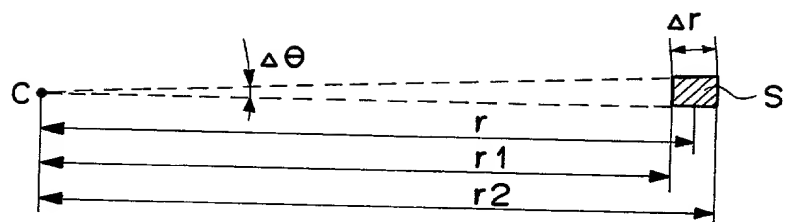

F I G . 4 b

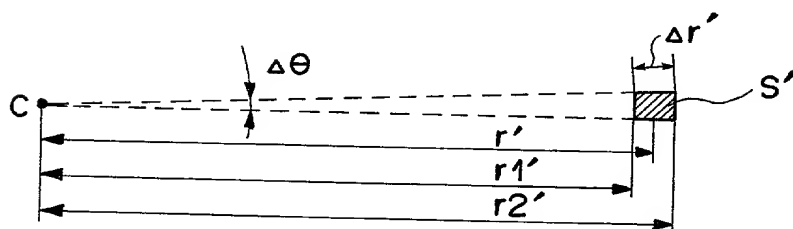

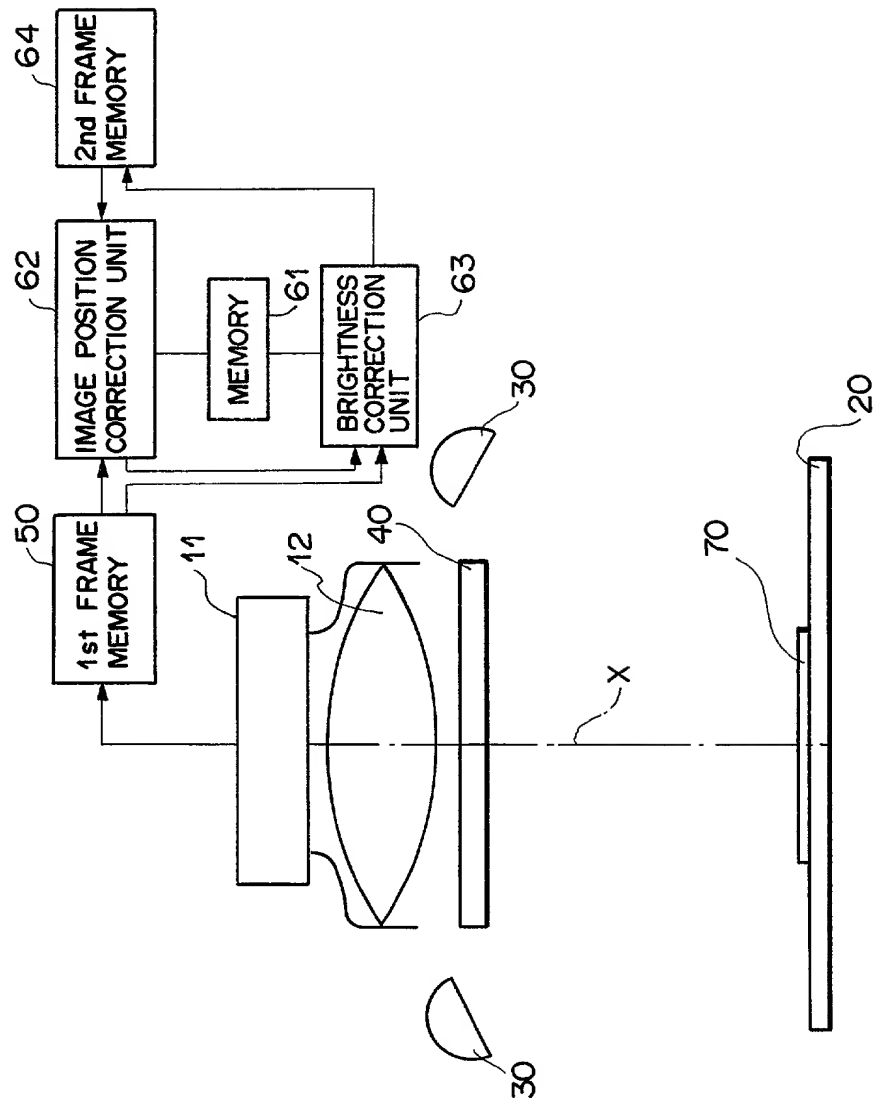


FIG. 5